

FIRST CARE™ MODEL 5010 ULTRA

GENERAL DIMENSIONS

Overall bed dimensions

Width	36.5"	(92.7 cm)
Length	92.0"	(233.7 cm)

Height (top of seat litter)

High	37.2"	(94.5 cm)
Low	19.6"	(49.8 cm)

Mattress dimensions

Width	33.0"	(83.8 cm)
Length	84.0"	(213.4 cm)

Mattress depth

Bed	5.0"	(12.7 cm)
Foot	3.0"	(7.6 cm)

Seat depth

Straight Edge	8.5" to 12.5"	(21.6 to 31.8 cm)
V-cut	15.5" to 19.5"	(39.4 to 49.5 cm)

Caster diameter

8.0"	(20.3 cm)
------	-----------


Critical angles

Head elevation	70°
Pelvic tilt	3°
Maximum Trendelenburg	8°

Lift capacity

Bed	500 lbs.	(227.0 kg)
Foot section	300 lbs.	(136.2 kg)
Head section	250 lbs.	(113.5 kg)

Stryker reserves the right to change specifications without notice.

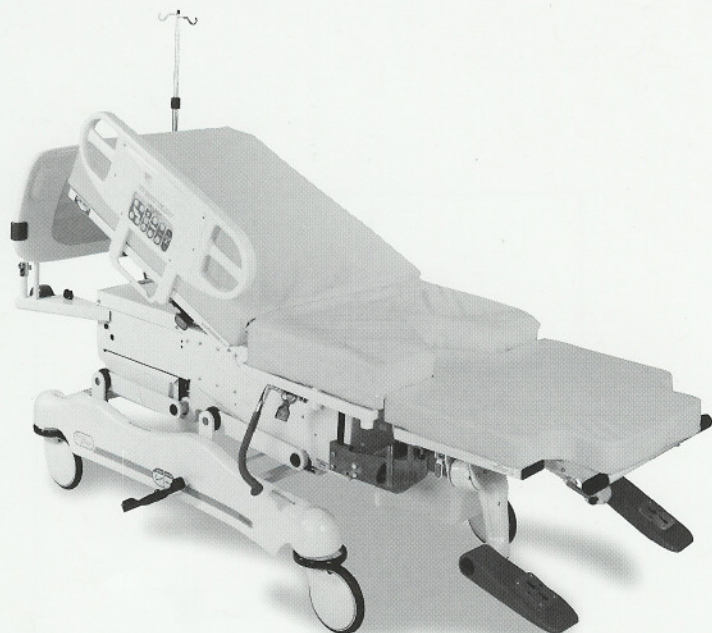

STANDARD FEATURES

- ▶ 3" (7.6 cm) thick foot mattress
- ▶ 5" (12.7 cm) thick enhanced comfort head and seat mattress
- ▶ 8" (20.3 cm) Omni Surface™ casters with wheel covers
- ▶ 19" (48.3 cm) low bed height
- ▶ 33" (83.8 cm) bed width with four motor functions (head, bed, foot, Trendelenburg)
- ▶ Automatic pelvic tilt
- ▶ CPR release
- ▶ Four-wheel ring brake system
- ▶ Glideaway foot supports with 5" (12.7 cm) adjustment and six-way adjustability
- ▶ In-rail motion controls with lockout
- ▶ Lightweight, self-standing foot section
- ▶ Locking caster steering
- ▶ Manual backup
- ▶ Night-light
- ▶ One step foot section breakdown
- ▶ Plastic fluid basin
- ▶ Removable headboard with wood laminate accent option
- ▶ Self-storing handgrips
- ▶ Single-button Trendelenburg
- ▶ Three-position siderails
- ▶ Two year parts and labor warranty

OPTIONAL FEATURES

- ▶ 6" (15.3 cm) casters
- ▶ Armboard
- ▶ Attachable/storable calf supports
- ▶ CPR board
- ▶ Extended warranty
- ▶ Freestanding calf supports
- ▶ Labor bar
- ▶ Linen for head and foot mattresses
- ▶ Lumbar and perineal pillows
- ▶ Multipurpose shelf
- ▶ Patented translating fowler adjusts seat depth
- ▶ Pendant with motion controls only
- ▶ Pendant with motion and communication controls
- ▶ Pendant with nurse call and motion controls
- ▶ Permanent folding IV pole
- ▶ Siderail communications: Nurse call only or Nurse call, TV/Radio, volume, speaker, room/ reading lights
- ▶ Skoocher™ adjusts depth from 12.5" to 8.5" (21.6 cm to 31.8 cm)
- ▶ Stainless steel basin
- ▶ Wood headboard

ELECTRICAL

- ▶ 115 VAC, 60 Hz, 7 Amp: 105 to 135 VAC operating range
- ▶ cUL listed
- ▶ Current leakage less than 100 microamperes
- ▶ EMC compatible with European medical device directive
- ▶ Five motor functions: bed, head, foot, Trendelenburg, translating fowler (optional)
- ▶ Hospital grade plug and three-wire heavy-duty cord
- ▶ UL listed